

482 - BUBBLE TRAX®


PRODUCT INFORMATION BROCHURE





For over 70 years, the name Notrax® has meant superior quality, service, and innovative products. Now this brand is a cornerstone of Justrite Safety Group, offering the widest selection of products to a variety of markets and applications including entrance mats, anti-fatigue/safety mats, and products designed specifically for use in professional food service environments. Notrax® offers a complete selection of floor matting options to meet any application requirement, quality expectation, and budget.

- **Track record of manufacturing high quality mats for over seventy years**
- **All products are manufactured in ISO certified facilities**
- **Notrax® offers anti-fatigue matting, entrance matting, safety matting, food service matting and specialty mats designed for a variety of industries**

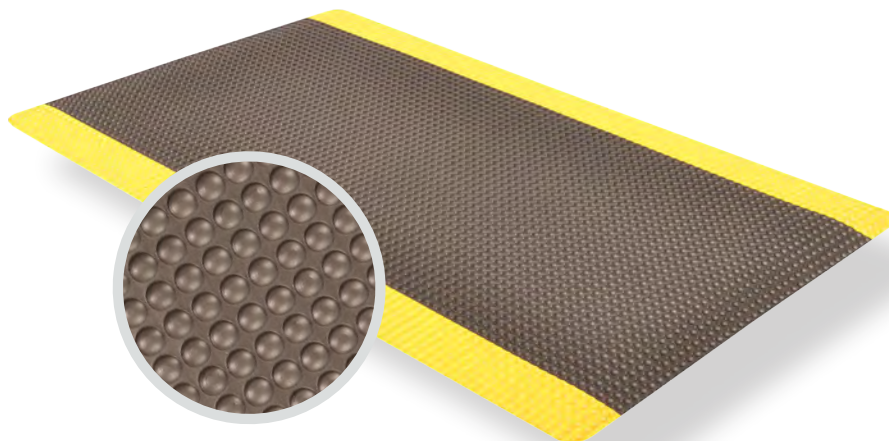


482 - BUBBLE TRAX® is a unique high performance anti-fatigue floor mat with a bubble top surface design providing extreme ergonomic comfort and durability. Bubble Trax® combines a heavy-duty vinyl top surface with a dense sponge backing utilizing Notrax® exclusive UniFusion™ technology. This virtually eliminates the possibility of delamination. All Notrax® laminate floor mats come standard with RedStop™, a uniquely engineered non-slip backing technology that eliminates the slipping and sliding of floor mats on smooth surface flooring such as tile, wood, marble, and treated concrete.

Material: Vinyl Surface With Dense Closed PVC Foam Base

Features and Benefits:

- Heavy-duty vinyl bubble top surface combined with a dense closed cell PVC foam base provides added cushioning comfort
- UniFusion™ bond guaranteed for the life of the mat
- Redstop™ non-slip backing to reduce mat slippage
- Beveled edges on all 4 sides
- Certified by the NFSI (National Floor Safety Institute)

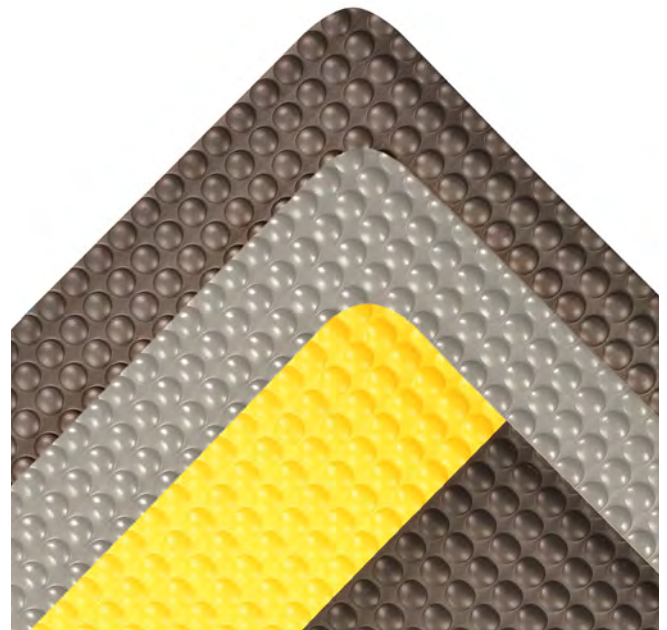

MODEL: 482






WARNING: This product can expose you to chemicals including di-2-ethylhexyl phthalate and/or diisononyl phthalate which is known to the State of California to cause cancer, birth defects or reproductive harm. For more information, visit www.P65Warnings.ca.gov

SPECIFICATIONS

APPLICATIONS

- Work Stations
- Packaging Areas
- Assembly Lines
- Pick Pack Aisles

| | |
|-------------|---|
| Stock Sizes | 2'x3', 3'x5' |
| Roll Sizes | 2'x75', 3'x75', 4'x75', 5'x75' *Grey not available in 4'x75' and 5'x75' |
| Thickness | 1/2" |
| Cut Lengths | 2', 3', 4' and 5' widths (up to 75' long) *Grey not available in 4' and 5' widths |
| Colors |  Black  Black/Yellow  Grey |

Performance:

Good Better Best Superior

| | |
|--------------------------|--|
| Wear Resistance | |
| Anti-fatigue Performance | |
| Slip Resistance | |



Anti-Fatigue



Anti-Slip



Cut Lengths



Insulation

TESTING DATA

| Test | Test Description | Results |
|------------------------------|---|--|
| Compression Deflection | Test specimen is subjected to varying compression load levels and the resulting deflection was measured. The greater the deflection, the better the anti-fatigue properties. (Inches) | @ 20 lbs/sq. in. - 0.328 @ 40 lbs/sq. in. - 0.390 |
| ASTM D-3884-01 | Abrasion Resistance (Measured in weight loss) | @ 500 cycles - 0.1% @ 1000 cycles - 0.2% |
| ASTM C-1028-96 | Static Coefficient of Friction | 0.970 |
| ASTM D-2240-02 | Durometer / Hardness | Shore A - 95 |
| ASTM D-1004-94a-03 | Tear Resistance (Measured in lbs.) | 54.6 |
| CPSC FF 1-70 (ASTM D2859) | Surface Flammability of Carpets and Rugs Ignition Characteristics - Finished Textile Floor Covering Material | Pass |
| ASTM D-1004 | Tear Resistance | 57.3 lbs |

*Testing performed by an independent test laboratory.

