


**825 - CUSHION STAT™
W/DYNA-SHIELD®**
PRODUCT INFORMATION BROCHURE





For over 70 years, the name Notrax® has meant superior quality, service, and innovative products. Now this brand is a cornerstone of Justrite Safety Group, offering the widest selection of products to a variety of markets and applications including entrance mats, anti-fatigue/safety mats, and products designed specifically for use in professional food service environments. Notrax® offers a complete selection of floor matting options to meet any application requirement, quality expectation, and budget.

- **Track record of manufacturing high quality mats for over seventy years**
- **All products are manufactured in ISO certified facilities**
- **Notrax® offers anti-fatigue matting, entrance matting, safety matting, food service matting and specialty mats designed for a variety of industries**

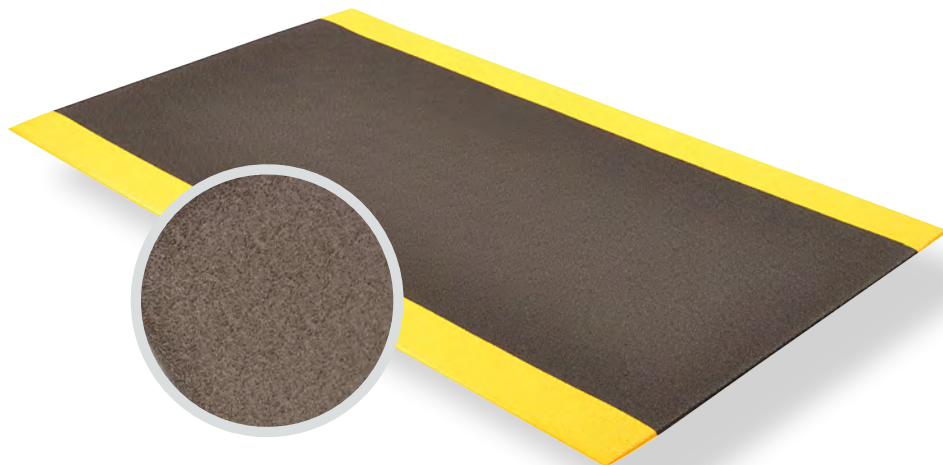


825 - CUSHION STAT™ W/DYNA SHIELD® is a dissipative/anti-static mat that is specially formulated to absorb static electricity keeping sensitive electronic circuitry safe from damage. The anti-fatigue properties are designed to provide traction with its non-directional pebble embossed top surface that allows for sure footing and is easy to sweep clean. The Notrax® exclusive Dyna-Shield® PVC sponge is manufactured with a tough protective top layer that provides long lasting wear and outperforms the competition in tear resistance and tensile strength. Designed for use in medium duty dry work areas.

Material: PVC

Features and Benefits:

- Static dissipative PVC sponge
- Absorbs static electricity keeping sensitive electronic circuitry safe
- Non-directional pebble textured embossed mat
- PVC foam provides added cushioning comfort
- Exclusive Dyna-Shield® top surface manufactured directly into the mat for long lasting wear
- Superior tear resistance and tensile strength
- Beveled edges on all 4 sided
- RG $10^6 - 10^9 \Omega$; RP $10^6 - 10^9 \Omega$
- Grounding cord available, not required

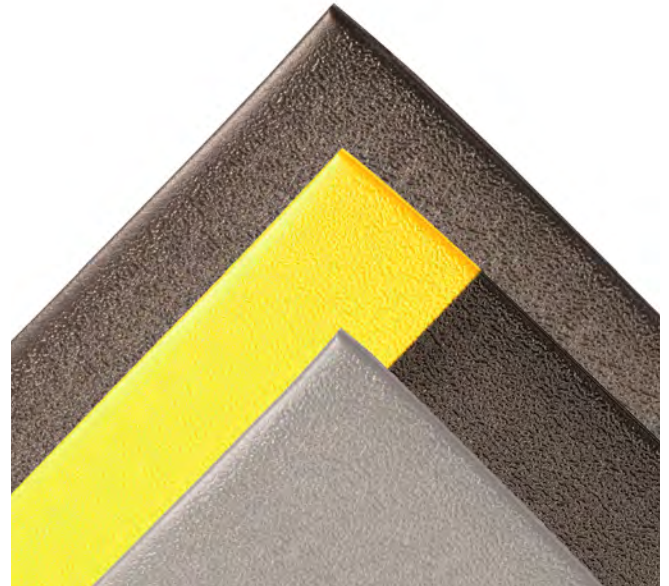

MODEL: 825


SPECIFICATIONS

Stock Sizes	2'x3', 3'x5', 3'x10'
Roll Sizes	3'x60', 4'x60'
Thickness	3/8"
Cut Lengths	3', and 4' widths (up to 60' long)
Colors	 Black  Black/Yellow  Grey

Performance:	Good	Better	Best	Superior
Wear Resistance				
Anti-fatigue Performance				
Slip Resistance				

APPLICATIONS

- Assembly Lines
- Testing Areas
- Electronic Areas
- Workstations

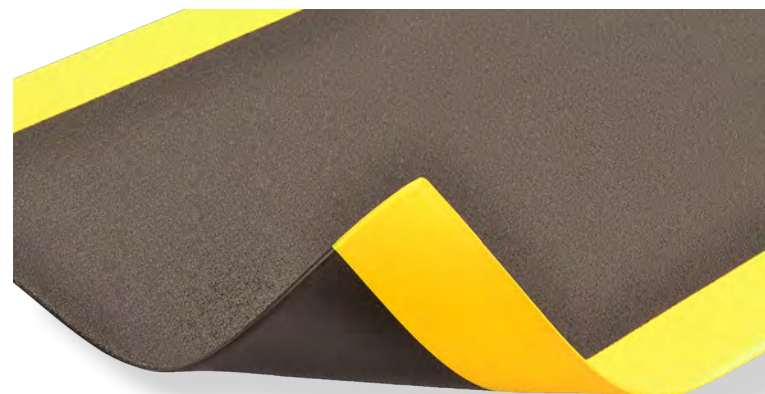

TESTING DATA

Test	Test Description	Results
-	Compression Deflection	@ 20 lbs/in ² : 0.250 @ 40 lbs/in ² : 0.283
ASTM C1028-96	Coefficient of Friction	.79
ASTM D3884-01	Abrasion Resistance	5.06 Grams
ASTM D412	Elongation	125%
ANSI/ESD 7.1	Protection of Electrostatic Discharge of Susceptible Items - Flooring Materials (50% relative humidity)	Surface/Ground: Avg: 1.6 x 10 ⁷ Ohms Surface/Surface: Avg: 2.6 x 10 ⁷ Ohms

*Testing performed by an independent test laboratory.

