


MODEL No: 0477

ISSUED: 1-87

REVISED: 6-05

## RECESSED TOILET SEAT COVER DISPENSER

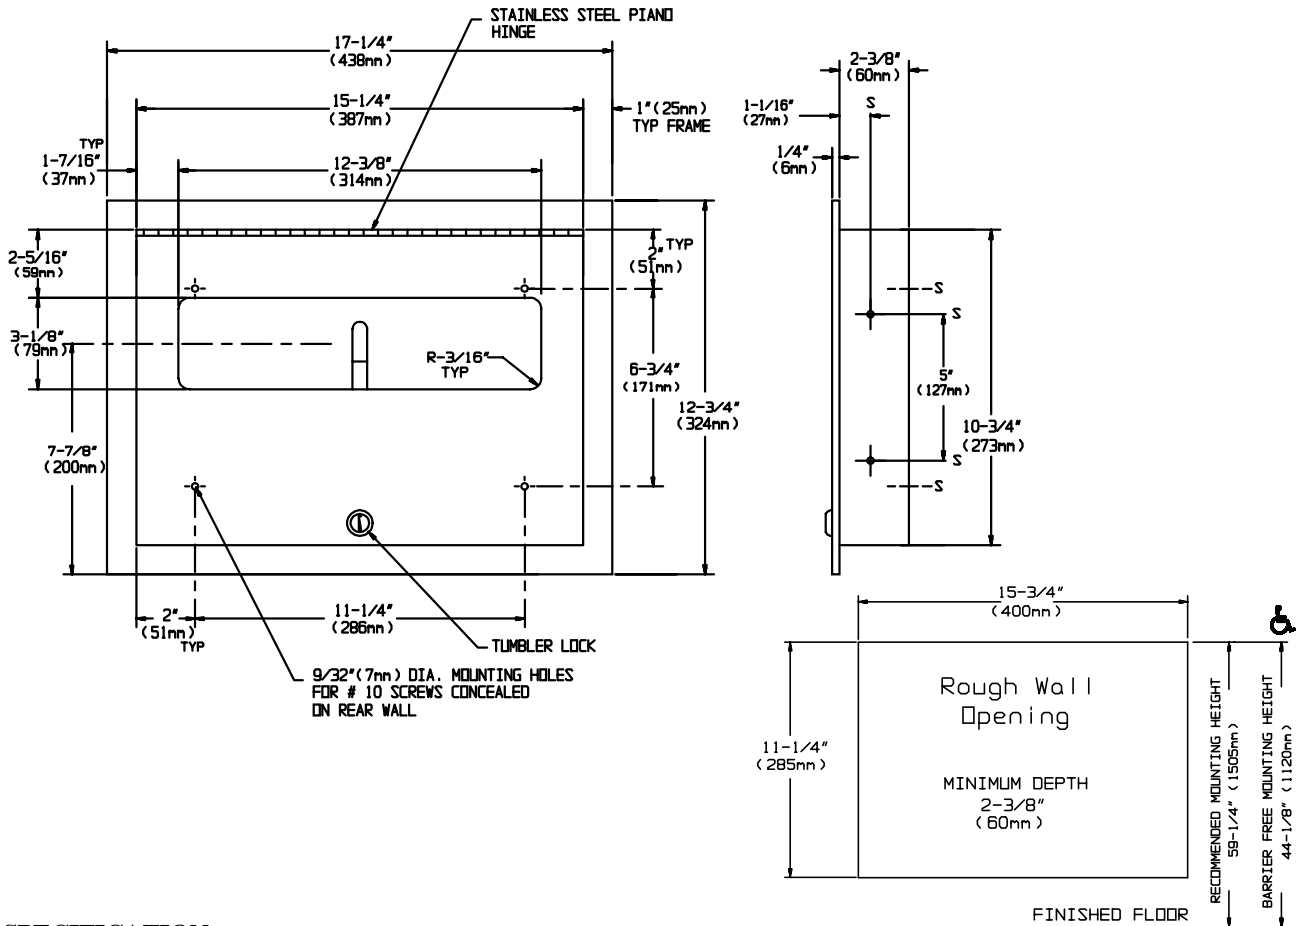

### SPECIFICATION

Recessed Toilet Seat Cover Dispenser shall hold and dispense 500 standard single or half-fold paper toilet seat covers contained in supply box and shall have cabinet, frame and door fabricated of alloy 18-8 stainless steel, type 304, N<sup>o</sup>22 gauge; all exposed surfaces shall have N<sup>o</sup>4 satin finish protected during shipment with a PVC film which shall be easily removable after installation. Face trim frame shall be one piece construction 1" (25.4mm) wide with no welded miters and shall have a 1/4" (6.35mm) return to wall. Cover dispensing slot shall have a fully deburred flat edge for snag-free dispensing and user safety. Door shall be attached to face frame with a full-length, heavy-duty 3/16" dia. (4.8mm) stainless steel multi-staked piano hinge and shall be held closed with a tumbler lock keyed alike to other ASI washroom equipment. Structural assembly of cabinet and door components shall be of welded construction and shall have no exposed fasteners or welded seams.

### INSTALLATION

Unit is mounted in wall recess using four (4) N<sup>o</sup> 10 self tapping screws (by others). Mounting holes are provided in side and rear walls of cabinet and are accessible through door for installation. Note that top of dispenser slot is 2-1/2" (64mm) below top of rough wall opening.

**Rough Wall Opening required is.... 15-3/4"W x 11-1/4"H x 2-5/8"D. (400mm x 285mm x 67mm).**

### OPERATION

Covers are self-feeding until supply is depleted. Unit is manually reloaded with a full box through access door.