


MODEL No: 0825

ISSUED: 1-87

REVISED: 7-05

## SURFACE MOUNTED LARGE CAPACITY WASTE RECEPTACLE

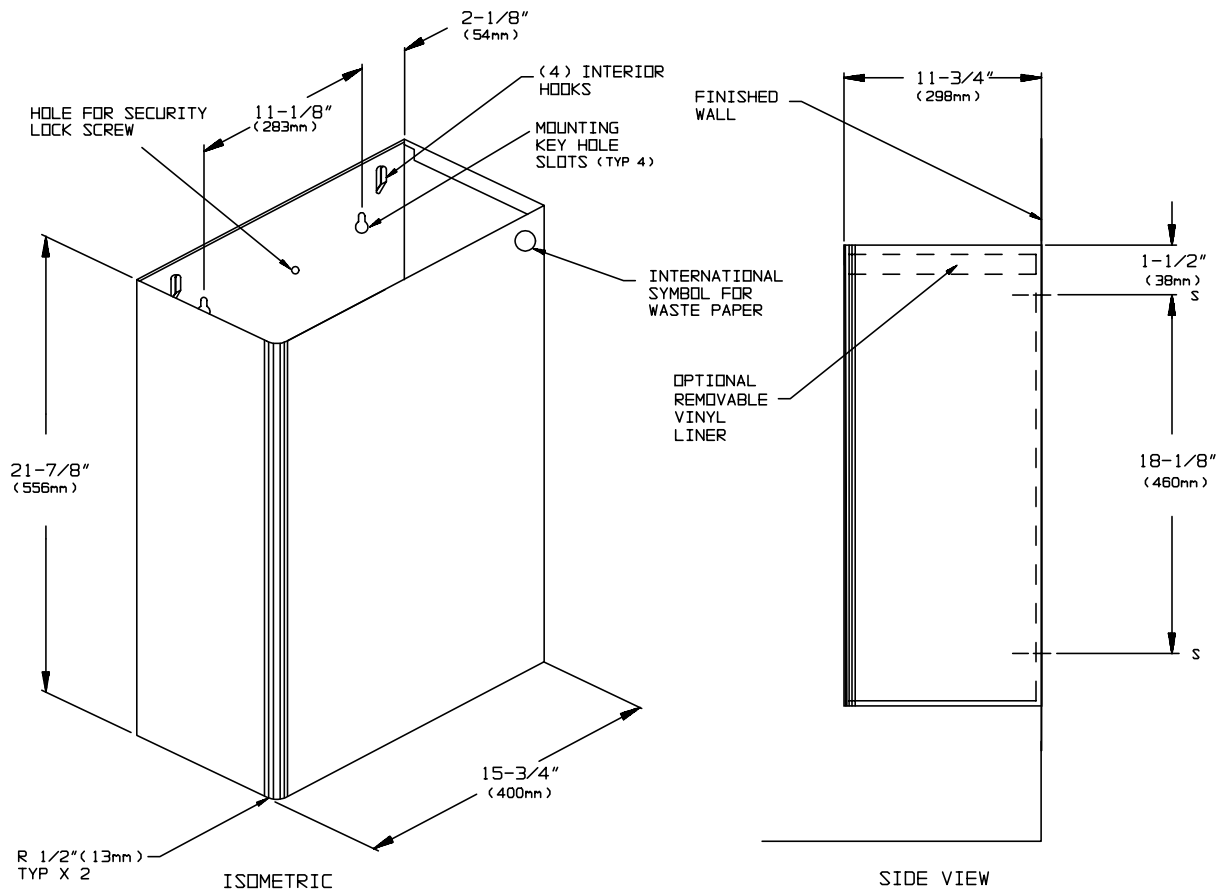

### **SPECIFICATION**

Surface Mounted Large Capacity Waste Receptacle shall hold 17 gallons (64 liters). Unit shall be fabricated of alloy 18-8 stainless steel, type 304, 22 gauge with N°4 satin finish and be protected during shipment with a PVC film easily removable after installation. Receptacle shall have no exposed fastening devices or spot welded seams and have front vertical edges rounded to 1/2" (13mm) radius. Receptacle shall have four (4) interior hooks for hanging a reusable heavy gauge vinyl liner bag with grommets (supplied with unit; to order replacements specify model 25-PY). Receptacle shall be screw mounted to wall through keyhole slots on back of unit and shall be theft resistant after installation of concealed locking screw.

### **INSTALLATION**

For general utility, mount the receptacle 16" (406mm) above finished floor (AFF) from bottom of unit. Hang unit on pre-installed four (4) screws (by others) on wall through the mounting keyhole slots. Install and fasten theft-resistant screw (by others) to wall through top middle hole of receptacle.

### **OPERATION**

User deposits waste material. Maintenance schedule determines trash removal cycle. Unit is emptied by removing either disposable bag (supplied by others) or reusable liner bag (one supplied) to empty into appropriate bulk collection container. Liner bag is washable and reusable and replacements are available should they be required (specify model 25-PY).