

950 - KNEE RXTM PRODUCT INFORMATION BROCHURE



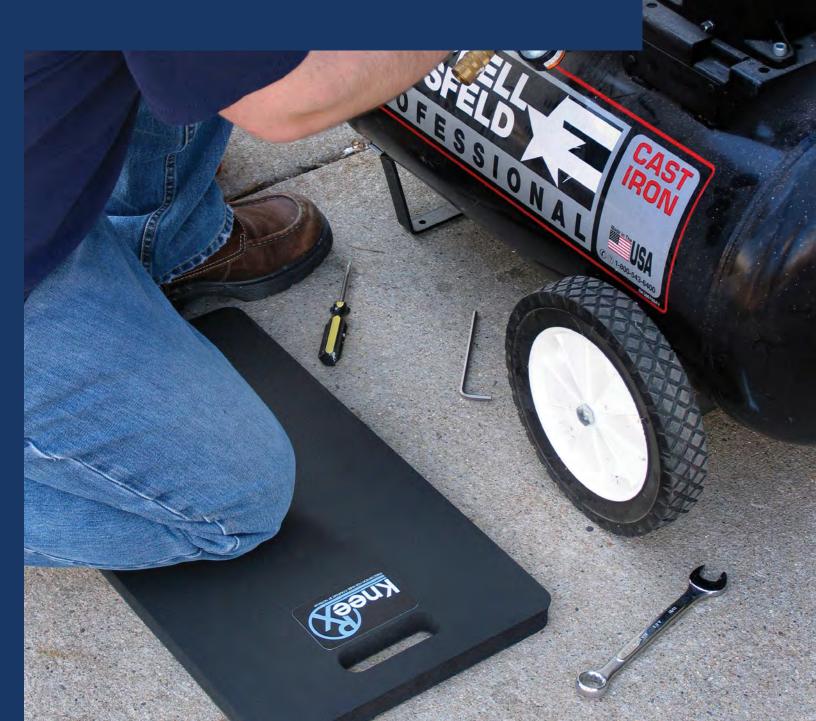

For over 70 years, the name Notrax[®] has meant superior quality, service, and innovative products. Now this brand is a cornerstone of Justrite Safety Group, offering the widest selection of products to a variety of markets and applications including entrance mats, anti-fatigue/safety mats, and products designed specifically for use in professional food service environments. Notrax[®] offers a complete selection of floor matting options to meet any application requirement, quality expectation, and budget.

- Track record of manufacturing high quality mats for over seventy years
- All products are manufactured in ISO certified facilities
- Notrax[®] offers anti-fatigue matting, entrance matting, safety matting, food service matting and specialty mats designed for a variety of industries

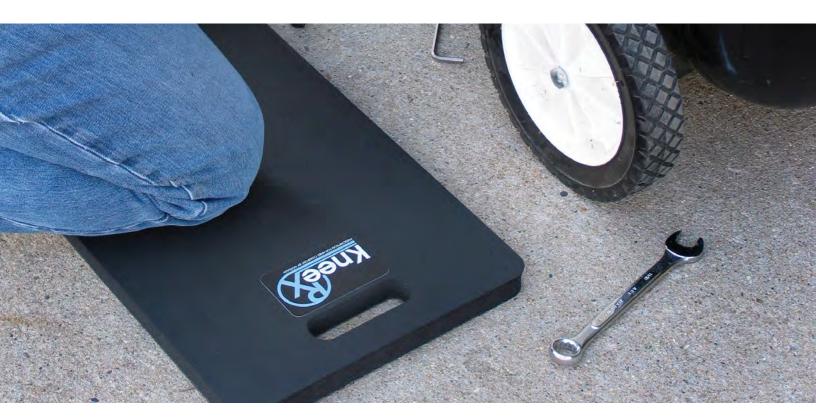

PRODUCT INFO

950 - KNEE RXTM kneeling mat was designed for extreme kneeling applications such as gravel, asphalt, concrete, tile, and wood flooring, providing ergonomic support by reducing trauma, stress and strain on the knees and lower back. Perfect for tool and maintenance carts, or for individual workstations, Knee RXTM is made from a nitrile/PVC foam blend offering resistance to oils and greases, and is a full 1" thick for the ultimate in comfort. Knee RXTM provides a comfortable work surface for those who are required to occasionally kneel while working and eliminates the hassle and discomfort of wearing knee pads.

Material: Nitrile/PVC

Features and Benefits

- Designed for comfort and durability in extreme kneeling applications
- For use on gravel, asphalt, concrete, dirty/oily surfaces, tile & wood flooring, metal grating, grass
- Nitrile/PVC foam blend for the highest degree of resistance to oils and greases
- Full 1" thick for the ultimate in comfort
- Self-extinguishing, non-conductive, silicone free material
- Built-in handle easy to carry or hang up

WARNING: This product can expose you to chemicals including di-2-ethylhexyl phthalate and/or diisononyl phthalate which is known to the State of California to cause cancer, birth defects or reproductive harm. For more information, visit www.P65Warnings.ca.gov



MODEL: 950



SPECIFICATIONS

Stock Sizes	12″x14″, 12″x22″
Thickness	1″
Colors	Black





TESTING DATA

Test	Test Description	Results
25% Compression Resistance (psi)	ASTM D1056 25	6.0 - 12.0
50% Compression Set (%)	ASTM D1056	25 max.
Water Absorption (lb/ft2)	ASTM D1667	0.1 max.
Tensile Strength (psi)	ASTM D412	90 min.
Elongation (%)	ASTM D412	100 min.
Flammability FMVSS302	O Burn Rate	Pass

*Testing performed by an independent test laboratory.

