


MODEL №: 3700

ISSUED: 01/87

REVISED: 06 Nov 2012

## 1-1/4" DIA (Ø32) GRAB BAR SERIES WITH SNAP-ON FLANGE COVERS

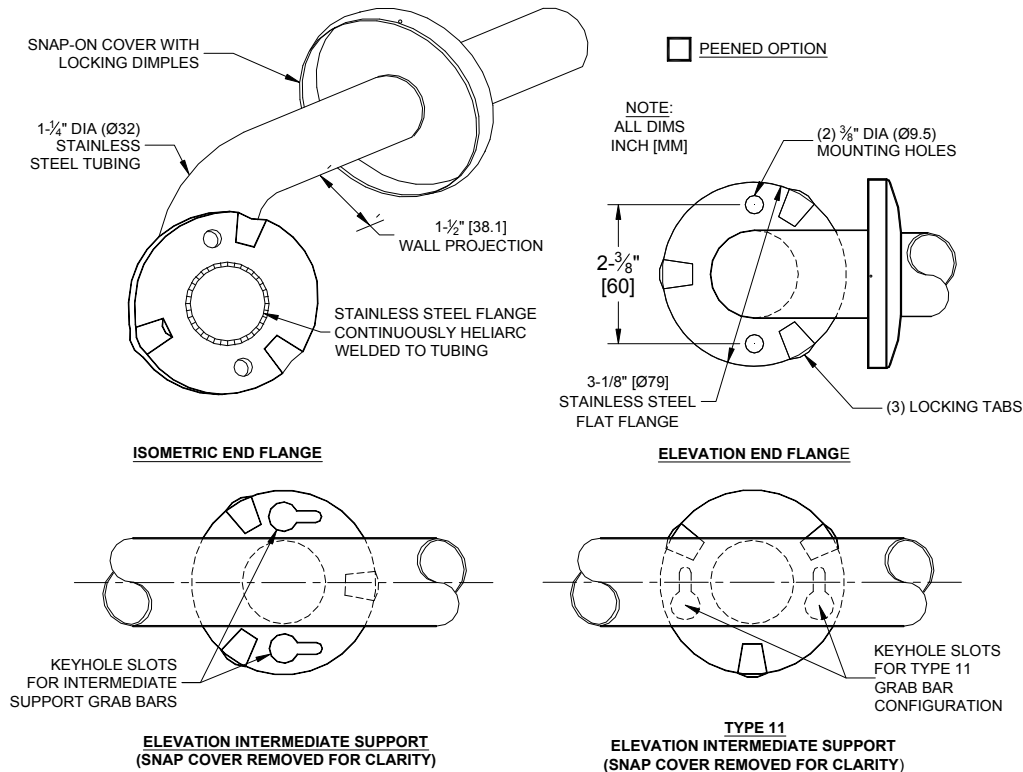

### SPECIFICATION

Grab Bar with Snap-On Flange Covers for concealed mounting shall be type 304 stainless steel alloy 18-8. Tubing shall be 1-1/4" diameter (Ø32) x 18 gauge [0.048"] (1.2). Snap-on cover shall be 22 gauge [0.03"] (0.8). Flange shall be 1/8" (3) thick and shall be Heliarc welded to tubing with a continuous concealed bead. End flanges shall have two (2) 3/8" diameter (Ø9.5) mounting holes. Center posts (if any) shall have (2) keyhole slots to ease installation access. All exposed surfaces shall have a satin finish and shall be protected during shipment with a plastic bag. For optional non-slip surface add suffix -P (peened).

**1-1/4" Diameter (Ø32) Grab bar with Snap-On Flange Covers shall be Series № 3700 of American Specialties, Inc., 441 Saw Mill River Road, Yonkers, New York 10701- 4913**

### STRENGTH

ASI Grab Bars are designed to meet and exceed ADA requirements as published in CABO/ANSI A117.1 and 2010 ADA Accessibility Standards. Mounting to the wall is a critical part of the system to meet this requirement. To withstand the shear, tension or pullout, and torsion loads generated by the maximum loading, the fastener system must be adequately sized.

### INSTALLATION

Use grab bar as template to mark mounting holes locations and pre-drill holes. Install bar using two (2) № 10 self-tapping pan head screws and flat washers (by others) or other fastener system (by others) to suit conditions for each flange. Appropriate anchoring and backing must be provided in accordance with local building codes or as specified on Architects Plans prior to wall finishing. For compliance with 2010 ADA Accessibility Standards install unit so that the top of the grab bar is 33" (840) minimum above finished floor (AFF) to 36" (915) maximum AFF. Anchors are available from ASI and must be specified separately for each grab bar style scheduled (see 3900 series).



AMERICAN SPECIALTIES, INC.  
441 Saw Mill River Road, NY 10701  
(914) 476.9000 • (914) 476.0688  
www.americanspecialties.com


MODEL No: GRABBAR CONFIG

ISSUED: 09/96

REVISED: 23 FEB 2015


## GRAB BAR CONFIGURATIONS (PG 1 OF 3)

TYPE -01

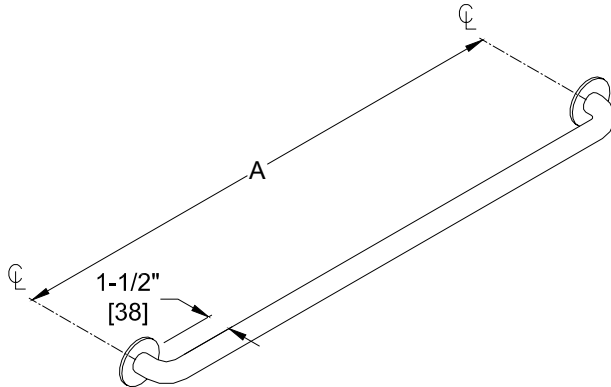


| SCHEDULE |           |      |            |
|----------|-----------|------|------------|
| QTY.     | DIM. A    | QTY. | DIM. A     |
|          | 12" [305] |      | 36" [914]  |
|          | 18" [457] |      | 42" [1067] |
|          | 24" [610] |      | 48" [1219] |
|          | 30" [762] |      |            |

TYPE -02

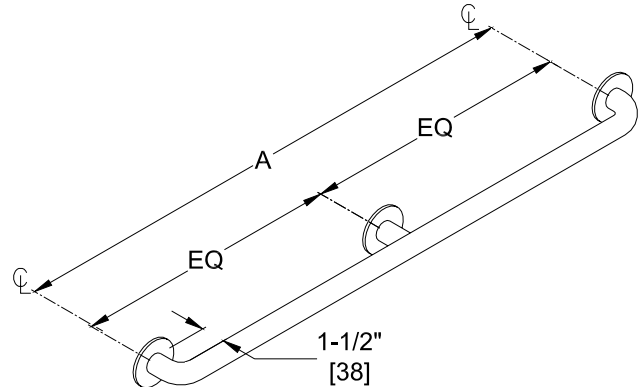

| SCHEDULE |            |
|----------|------------|
| QTY.     | DIM. A     |
|          | 52" [1321] |
|          | 54" [1372] |
|          | 60" [1524] |
|          | 72" [1829] |

TYPE -04

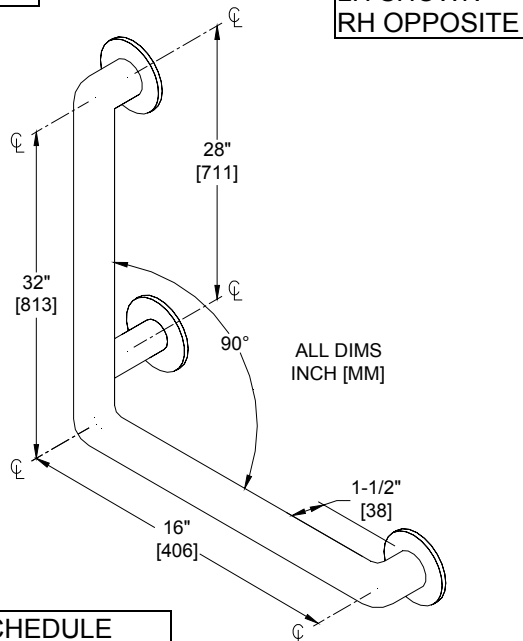


LH SHOWN  
RH OPPOSITE

| SCHEDULE |      |
|----------|------|
| QTY.     | HAND |
|          | LH   |
|          | RH   |

MODEL No MUST SPECIFY  
-LH OR -RH

TYPE -15

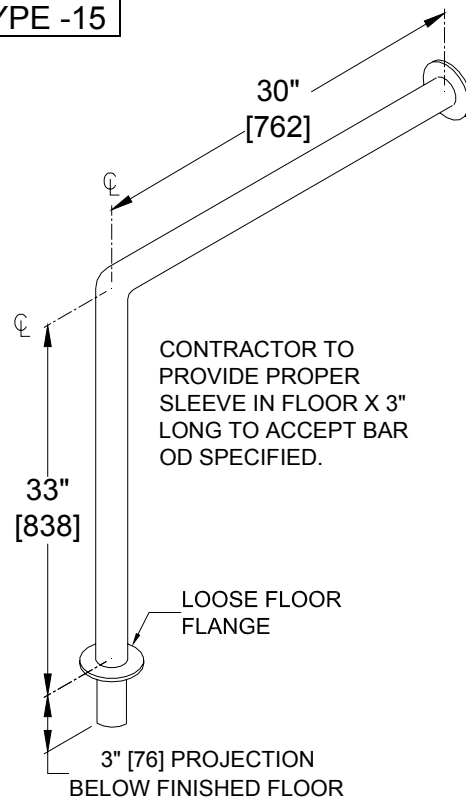

CONTRACTOR TO  
PROVIDE PROPER  
SLEEVE IN FLOOR X 3"  
LONG TO ACCEPT BAR  
OD SPECIFIED.

LOOSE FLOOR  
FLANGE

3" [76] PROJECTION  
BELOW FINISHED FLOOR

Accessory Specialties

AMERICAN DISPENSER

Desert Ray Products

WATROUS, INC.

THIS MANUFACTURER RESERVES THE RIGHT TO MAKE CHANGES IN DESIGN OR DIMENSIONS WITHOUT FORMAL NOTICE



**AMERICAN SPECIALTIES, INC.**  
 441 Saw Mill River Road, NY 10701  
 (914) 476.9000 • (914) 476.0688  
 www.americanspecialties.com


**MODEL №: GRABBAR CONFIG**

**ISSUED: 09/96**

**REVISED: 23 FEB 2015**

## GRAB BAR CONFIGURATIONS (PG 2 OF 3)


**TYPE -24**

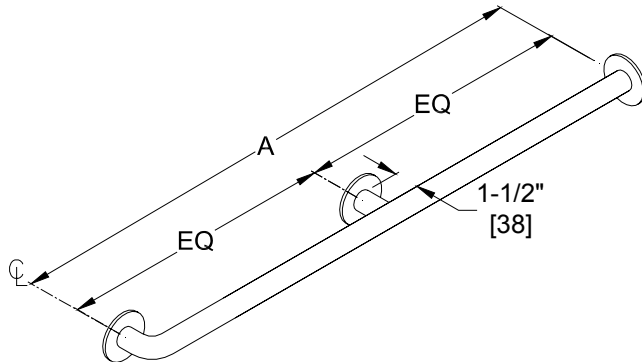

\* No center support

| SCHEDULE |            |      |            |
|----------|------------|------|------------|
| QTY.     | DIM. A     | QTY. | DIM. A     |
|          | 12" [305]* |      | 36" [914]  |
|          | 18" [457]* |      | 42" [1067] |
|          | 24" [610]  |      | 48" [1219] |
|          | 30" [762]  |      | 54" [1372] |

**TYPE -33**

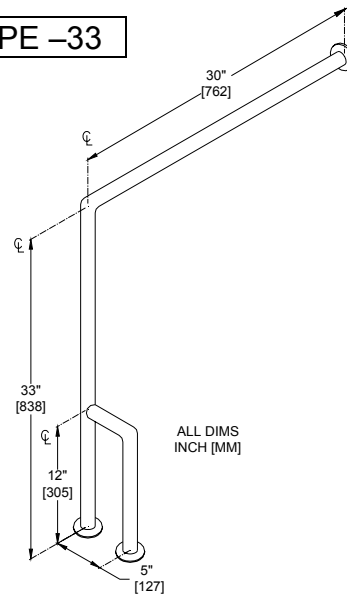


**RH SHOWN  
LH OPPOSITE**

ALL DIMS  
INCH [MM]

**MODEL № MUST SPECIFY LH OR -RH**


| SCHEDULE |      |
|----------|------|
| QTY.     | HAND |
|          | LH   |
|          | RH   |

**TYPE -34**

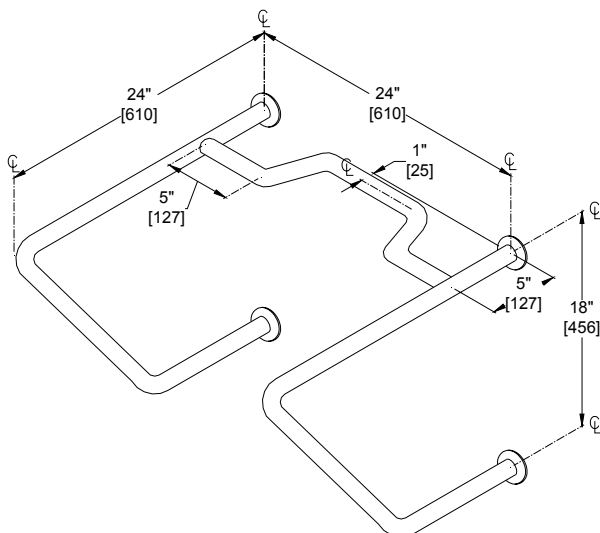

FOR BEDPAN FLUSH VALVE USE

**TYPE -75**

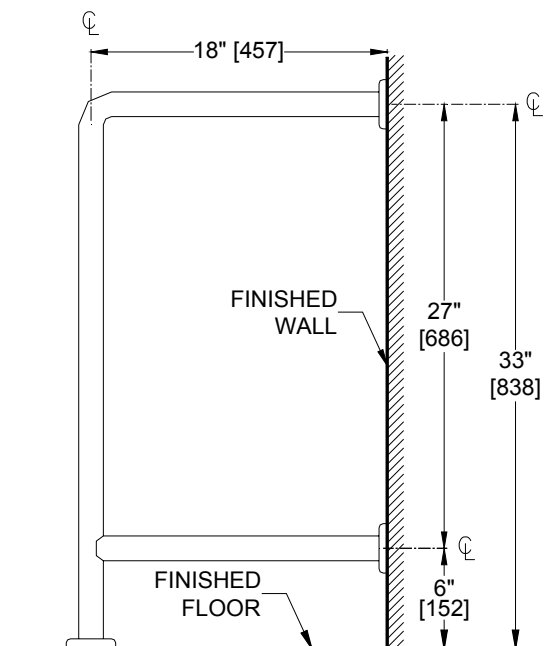

**Accessory Specialties**

**AMERICAN DISPENSER**

**Desert Ray Products**

**WATROUS, INC.**

THIS MANUFACTURER RESERVES THE RIGHT TO MAKE CHANGES IN DESIGN OR DIMENSIONS WITHOUT FORMAL NOTICE




**AMERICAN SPECIALTIES, INC.**  
 441 Saw Mill River Road, NY 10701  
 (914) 476.9000 • (914) 476.0688  
 www.americanspecialties.com

**MODEL №: GRABBAR CONFIG**

**ISSUED: 09/96**


**REVISED: 23 FEB 2015**

## GRAB BAR CONFIGURATIONS (PG 3 OF 3)

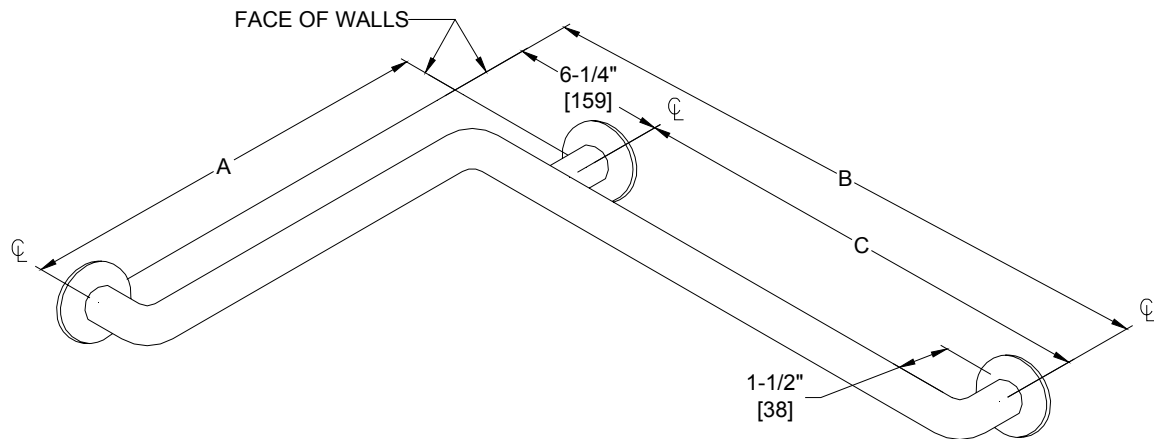

| SCHEDULE |      |               |               |                |
|----------|------|---------------|---------------|----------------|
| QTY      | TYPE | A             | B             | C              |
|          | 50   | 24" [610]     | 36" [914]     | 29-3/4" [756]  |
|          | 56   | 36" [914]     | 54" [1372]    | 47-3/4" [1213] |
|          | 57   | 42" [1069]    | 54" [1372]    | 47-3/4" [1213] |
|          | 60   | 18" [457]     | 30" [762]     | 23-3/4" [603]  |
|          | 74   | 18-1/8" [460] | 33-1/8" [841] | 26-7/8" [683]  |

### OPTION -25

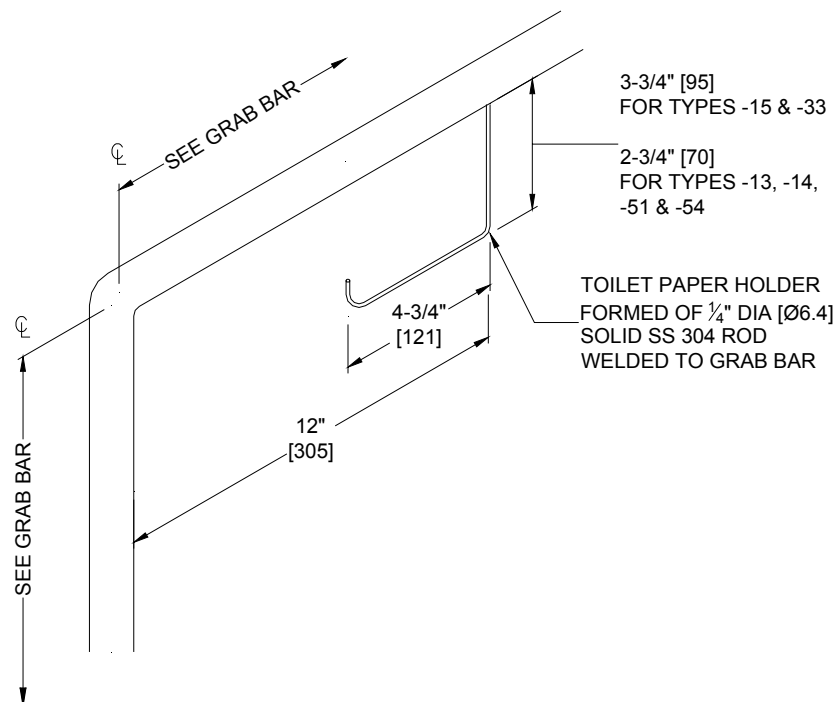

Option -25 Toilet Paper Holder is welded on to Grab Bars of the Swing Up or Swing Away configurations 3413, 3451, 3454 and Fixed Types -15, -33

**Accessory Specialties**

**AMERICAN DISPENSER**

**Desert Ray Products**

**WATROUS, INC.**

THIS MANUFACTURER RESERVES THE RIGHT TO MAKE CHANGES IN DESIGN OR DIMENSIONS WITHOUT FORMAL NOTICE