


737 - DIAMOND PLATE RUNNER


PRODUCT INFORMATION BROCHURE



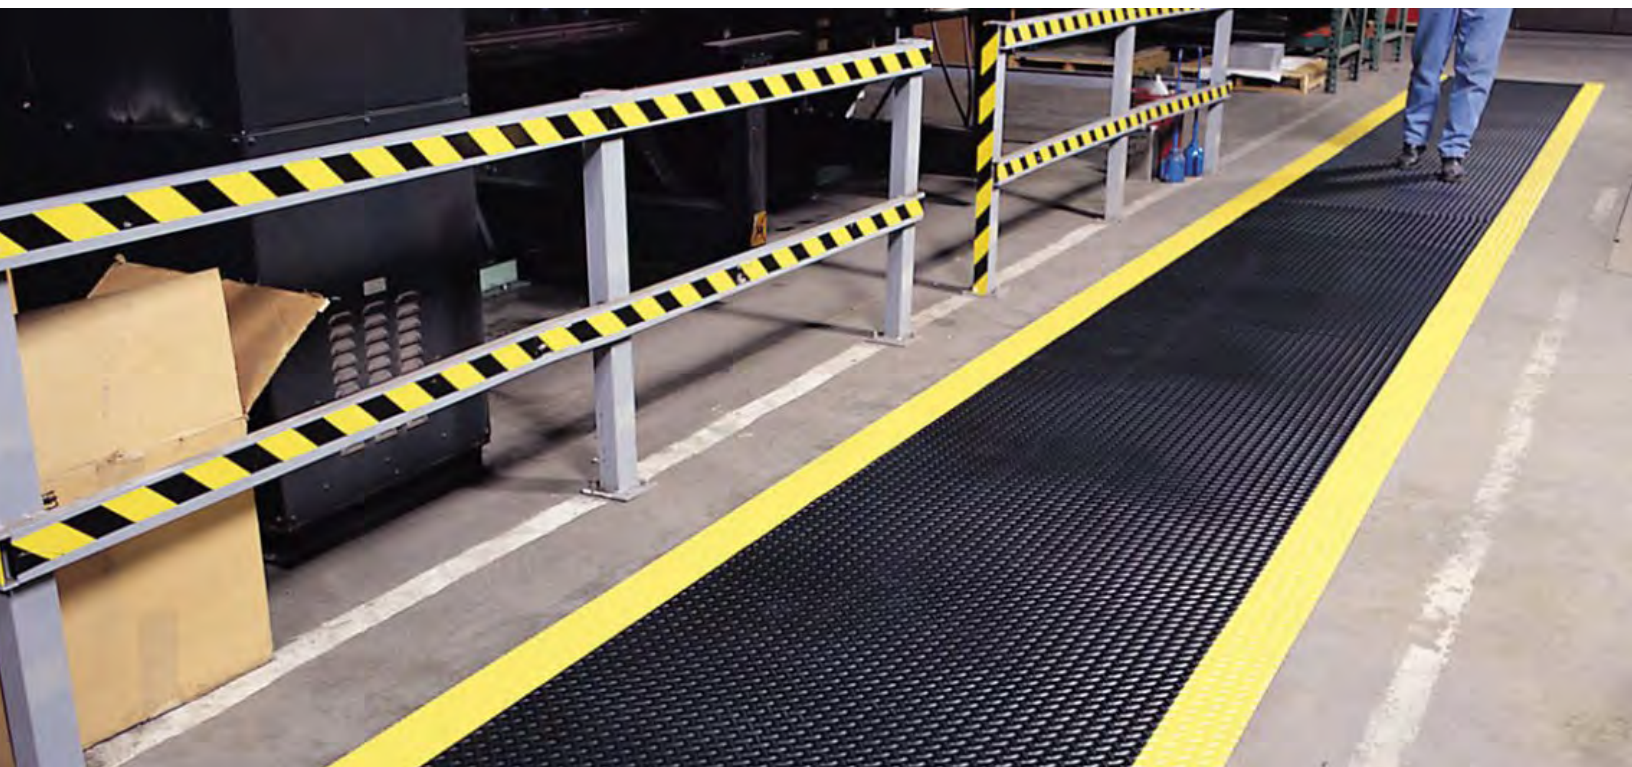

For over 70 years, the name Notrax® has meant superior quality, service, and innovative products. Now this brand is a cornerstone of Justrite Safety Group, offering the widest selection of products to a variety of markets and applications including entrance mats, anti-fatigue/safety mats, and products designed specifically for use in professional food service environments. Notrax® offers a complete selection of floor matting options to meet any application requirement, quality expectation, and budget.

- **Track record of manufacturing high quality mats for over seventy years**
- **All products are manufactured in ISO certified facilities**
- **Notrax® offers anti-fatigue matting, entrance matting, safety matting, food service matting and specialty mats designed for a variety of industries**

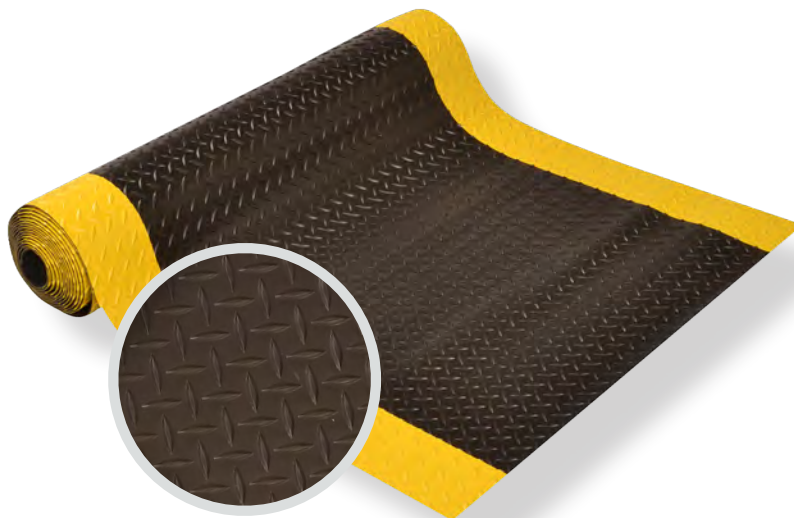

737 - DIAMOND PLATE RUNNER is a diamond-embossed top surface that yields exceptional traction from any direction. Made of durable vinyl, this runner is easy to sweep clean and has a low profile allowing for easy on/off cart traffic. Diamond Plate Runner is recommended for applications where safety and slip protection is needed with minimal anti-fatigue value such as aisles, warehouses, vending areas, and industrial passageways.

Material: Vinyl

Features and Benefits:

- Heavy-duty vinyl round rib surface pattern
- Made of 100% recycled vinyl materials
- Diamond-plate embossed top surface
- Non-directional traction that provides sure footing
- Provides barrier to cold floors and floor protection
- Low profile to eliminate trip hazards and allow for cart traffic

⚠ WARNING: This product can expose you to chemicals including di-2-ethylhexyl phthalate and/or diisononyl phthalate which is known to the State of California to cause cancer, birth defects or reproductive harm. For more information, visit www.P65Warnings.ca.gov






MODEL: 737


SPECIFICATIONS

APPLICATIONS

- Aisle Ways
- Warehouses
- Vending Areas
- Cart Traffic

Roll Sizes	2'x75', 3'x75', 4'x75', 5'x75'		
Thickness	5/32"		
Cut Lengths	2', 3', and 4' widths (up to 75' long)		
Colors	 Black	 Black/Yellow	 Grey

Performance:	Good	Better	Best	Superior
Wear Resistance				
Anti-Fatigue Performance				
Slip Resistance				

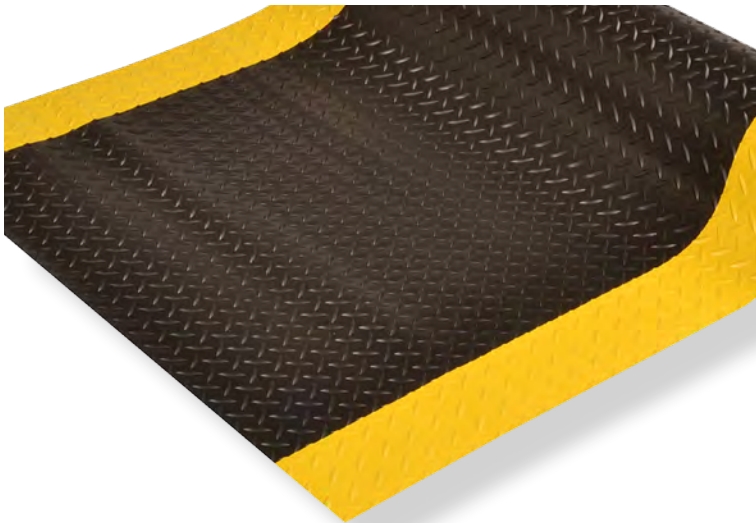

Anti-Slip



Cut Lengths



Floor Protection



Insulation

TESTING DATA

Test	Test Description	Results
Coefficient of Friction ASTM C1028-96	A neolite heel assembly with a predetermined load is pulled horizontally with a dynamometer to measure the force required to cause the assembly to slip.	.65
Abrasion Resistance ASTM D3884-01	Test specimen is subjected to the rubbing action of two abrading wheels under controlled conditions. Results measured in Weight loss (Grams)	3.02 Grams
Elongation ASTM D412	Test specimen is stretched at a specified rate until breaking point. The results are measured in weight needed to break, and % of size increase at breaking point.	150%
Hardness ASTM D2240-02	The hardness of a test sample is measured by means of a type A Shore Durometer. It measures the penetration of its specified indenter forced into the material under specified conditions	88

*Testing performed by an independent test laboratory.

